




Simple solutions for hurricane protection needs with brand names you know you can trust.

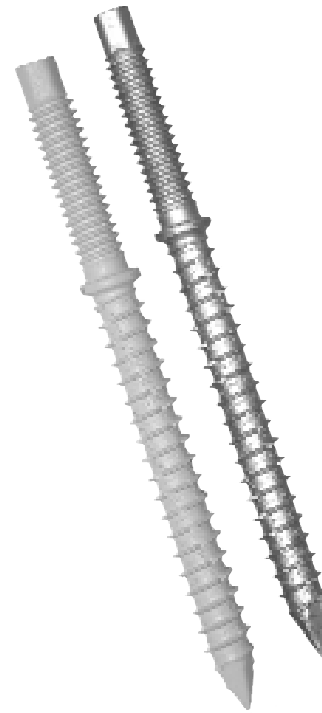

Applications

- Direct mount permanent anchors for quick and easy installations for metal and plywood panels to wood, hollow block, and concrete.

Product Features

- Threaded chamfered safety collar prevents overdriving.
Both lengths have 1/4-20 x 7/8" external thread above collar.
Available in UltraShield™ or white UltraShield™ for superior anticorrosion resistance in coastal environments.
3/16" Hex Drive.
Available in 2-1/4" and 3-1/4" lengths.
No caulking required.

Approvals and Listings

Miami Dade County Product Control Approved

Product Specifications

Table with 2 columns: Specification Name and Value. Rows include Diameter (1/4"), Point Type (Nail), and Finish (UltraShield or White UltraShield).

Selector Guide

Part Number	Description*	Coating	Box Qty.
3424000	1/4" dia. x 2-1/4"	UltraShield	1000
3424100	1/4" dia. x 2-1/4"	White UltraShield	1000
3425000	1/4" dia. x 3-1/4"	UltraShield	500
3425100	1/4" dia. x 3-1/4"	White UltraShield	500
3426910	3/16" Nut Driver	-	1
3098910	3/16" x 3-1/2" Masonry Drill Bit	-	1

*Length below safety collar.

Performance Data

Substrate	Embedment Depth	Edge Distance	Test	Value
Concrete 3295 PSI	1"	1.25"	Tension	1230 lbs.
	1"	2.50"	Tension	1701 lbs.
	1.75"	1.25"	Tension	2704 lbs.
	1.75"	2.50"	Tension	2844 lbs.
	1"	1.25"	Shear	1339 lbs.
	1"	2.50"	Shear	2333 lbs.
	1.75"	1.25"	Shear	1375 lbs.
Hollow Block 1500 PSI	1.25"	1.25"	Tension	1955 lbs.
	1.25"	2.50"	Tension	1940 lbs.
	1.25"	1.25"	Shear	536 lbs.
	1.25"	2.50"	Shear	1088 lbs.
Grout Filled CMU 2000 PSU	1.75"	1.25"	Tension	3335 lbs.
	1.75"	2.50"	Tension	3779 lbs.
	1.75"	1.25"	Shear	1207 lbs.
	1.75"	2.50"	Shear	2061 lbs.
Wood SYP 053 S.G.	1"	.75"	Tension	2779 lbs.
	1.50"	.75"	Tension	3589 lbs.
	1.50"	2"	Shear	1750 lbs.
	1.50"	.75"	Shear	841 lbs.
	1"	.75"	Shear	609 lbs.

